




INSTALLATION INSTRUCTIONS

**No. 39L
MAGNETIC CONTACT
WITH LEADS**

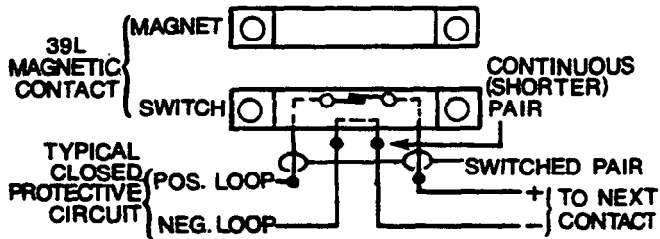

The SWITCH portion has 4 randomly connected colored leads. For easy identification during installation, the CONTINUOUS PAIR is shorter than the SWITCHED PAIR.

The pairs may also be identified with an ohmmeter. Separate the SWITCH from the MAGNET and test across the leads. The shorted wires are the CONTINUOUS PAIR.

MOUNTING ACCESSORIES AVAILABLE:
Nos. 24, 29 Brackets
No. 52 Spacer



ALARM DEVICE MANUFACTURING CO.

A DIVISION OF PITTMAN CORPORATION

165 Eileen Way, Syosset, New York 11791

P4485 REV. A 3/79

Copyright © 1979 PITTMAN CORPORATION