

INSTALLATION INSTRUCTIONS

Nos. 906, 908 Series MAGNETIC CONTACTS WITH LEADS Made in U.S.A. ⓅBP547

MODEL DESIGNATIONS			
MODEL NO.	CONTACTS, MAX. RATINGS	LEADS ^(D)	MOUNTING
906GY 906WH 906BR	SPST, 0.5A, 100V ^(A) 10W	4 COLORS. CODED. CONTINUOUS PAIR IS SHORTER THAN SWITCHED PAIR	SURFACE ^(B) SELF- ADHESIVE
906-2GY 906-2WH 906-2BR	SPDT, 0.3A, 30V, 3W	WITH MAGNET ENGAGED { WHITE: COMMON BLACK: CLOSED GREEN: OPEN RED: NOT USED	
908GY 908WH 908BR	SPST, 0.5A, 100V, ^(A) 10W	SAME AS 906 SPST MODELS	SURFACE ^(C) SCREW MOUNT
908-2GY 908-2WH 908-2BR	SPDT, 0.3A, 30V, 3W	SAME AS 906 SPDT MODELS	
HOUSING COLORS: GY = GRAY, WH = WHITE, BR = BROWN			

^(A) IN CANADA: 30V (MAX) FOR CLASS 2 WIRING


^(B) APPLY SELF-ADHESIVE MODELS ONLY TO A SMOOTH FLAT, OIL-GREASE-AND-WAX-FREE DRY SURFACE THAT HAS BEEN CLEANED WITH AMMONIA, DENATURED ALCOHOL OR A SIMILAR SUBSTANCE.

^(C) OPTIONAL MOUNTING ACCESSORY FOR SCREW MOUNT MODELS: 918GY (WH, BR) SPACER

^(D) MODEL NOS SHOWN HAVE 18" LEADS. ADD SUFFIX "-5" FOR MODELS WITH 5" LEADS

TYPICAL CONNECTIONS

SPST MODELS:

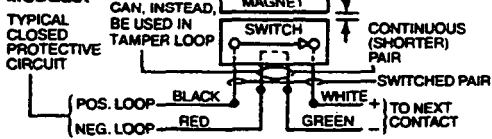

SPDT MODELS:

