


No.717 BLASTER UNIT

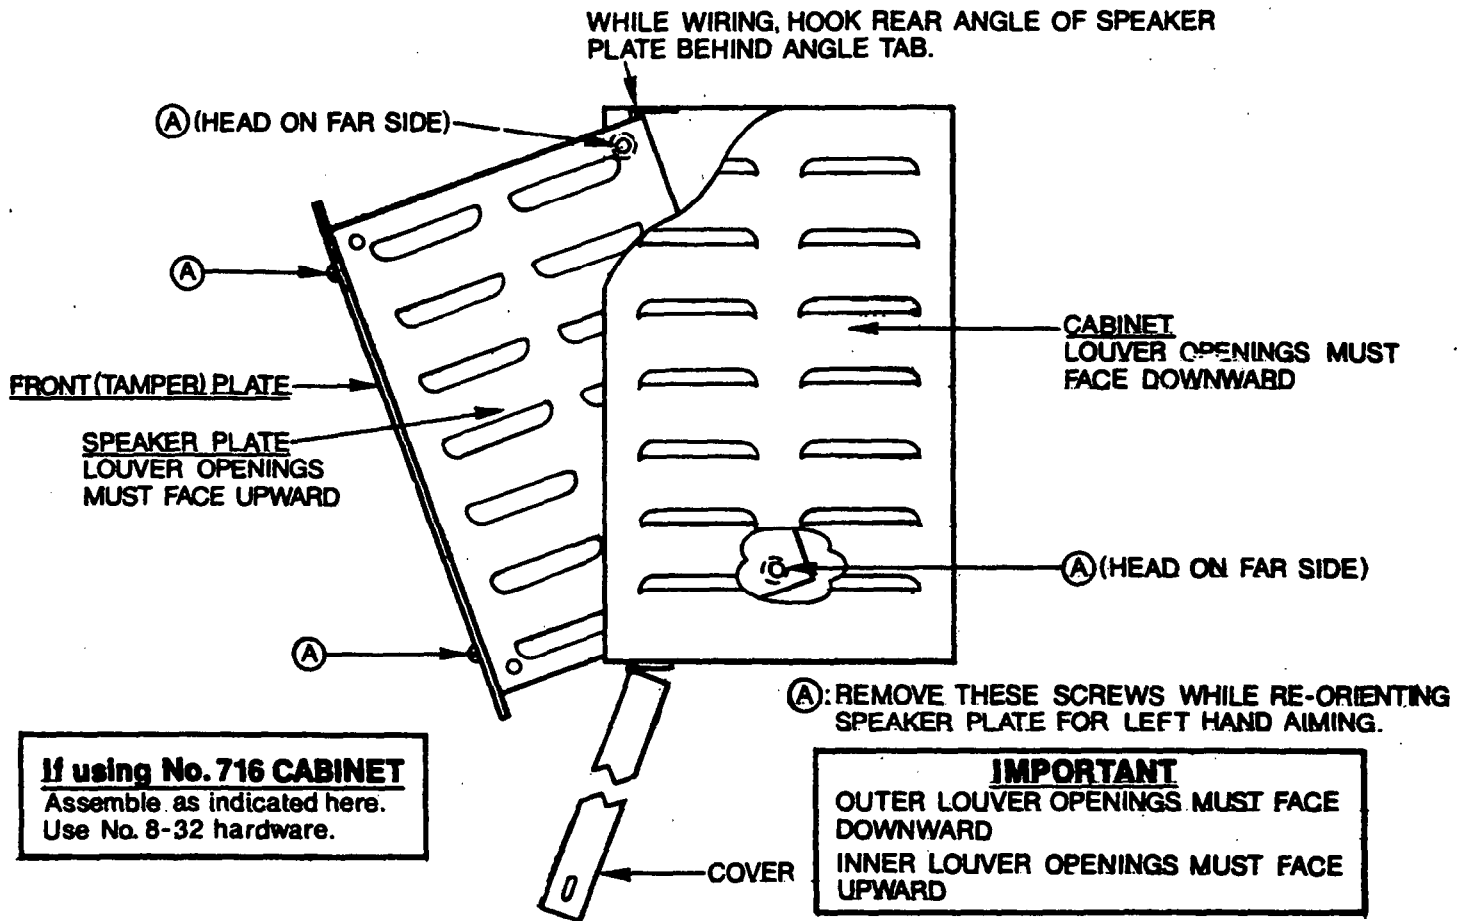

1. MOUNT OUTER CABINET: Remove inner assembly from cabinet. Mounting holes and knockouts are provided at rear of outer cabinet. Outer cabinet louver openings must face downward.
2. RE-ORIENT SPEAKER PLATE IF LEFT HAND AIMING DESIRED: Unit is furnished as shown in diagram, with speaker aiming out of RIGHT side of cabinet.

To point speaker in the oppositedirection, proceed as follows:

- a. Remove 4 screws indicated by "A" in diagram. Leave speaker attached to front (tamper) plate.
- b. Turn speaker plate 180° so that its louver openings face in opposite direction and replace the 4 "A" screws in positions similar to those previously used.

NOTE: FOR PROPER PROTECTION FROM VANDALS, SPEAKER PLATE (INNER) LOUVER OPENINGS MUST FACE UPWARD when inner assembly is replaced in outer cabinet.

3. MAKE WIRING CONNECTIONS: To support inner assembly while wiring connections are made, rear angle of speaker plate may be hooked behind angle tab of cabinet, as shown in diagram.
4. REPLACE INNER ASSEMBLY IN CABINET: To repeat, speaker plate louver openings must face upward inside cabinet.

SIREN AND DRIVER MODULE COMBINATIONS

