

MODEL 679 SIREN DRIVER MODULE

LOWEST CURRENT DRAW SIREN DRIVER AVAILABLE

Features


- 6 or 12 volt operation
- Two channels sweep and steady
- Steady overrides sweep

Speaker Wire

- Under 150 feet - 18 gauge wire
- Over 150 feet - 16 gauge wire

Speaker

- @ 6 volts - 5 watt speaker minimum
- @ 12 volts - 15 watt speaker minimum

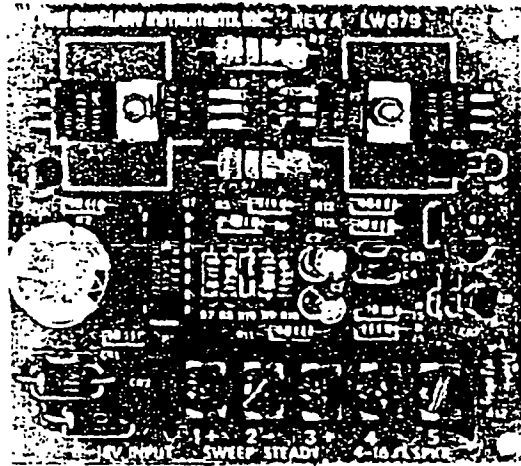


Sound A
Sound B

A general rule is the larger the speaker the more efficient it is and the more sound power it will deliver

Specifications

	Load	Voltage	Current Draw	Sound Level
Tested with Model 679 Speakers	4ohm	12	1.8 Amps	115 db
	8ohm	12	1.08 Amps	112 db
	16ohm	12	700 MA	112 db

Suggested Speaker Hook-up Patterns

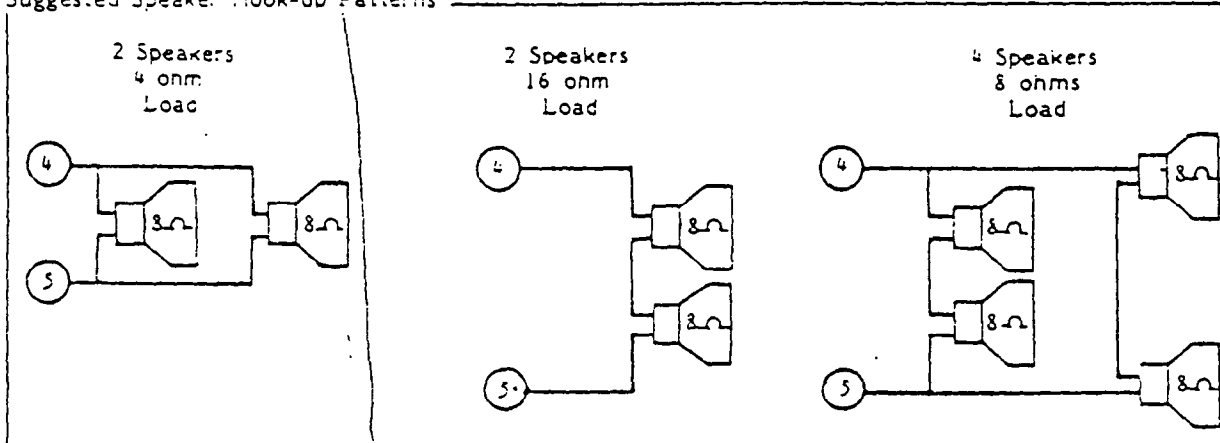

FBI Fire Burglary Instruments, Inc.

A Division of Pittway Corporation
 163 Eileen Way, Syosset, NY 11751
 (800) 654-5430 • (516) 921-8666