



FIRE BURGLARY INSTRUMENTS, INC.


S P E C I F I C A T I O N S

SH15

Shock Sensor

STANDARD FEATURES:

- 8' radius (1.8m-2,4m)
- Protects all types of glass: plate, wired, tempered, laminated
- Radius listed is for 1/4" thick glass
- Draws <1mA
- No processor required
- Mounts 1" (2.5cm) from corner
- Visible detector deters potential intruders
- False Alarm Resistant
- Compatible with most wireless transmitters
- 5 Year warranty
- Sold in bags of 5

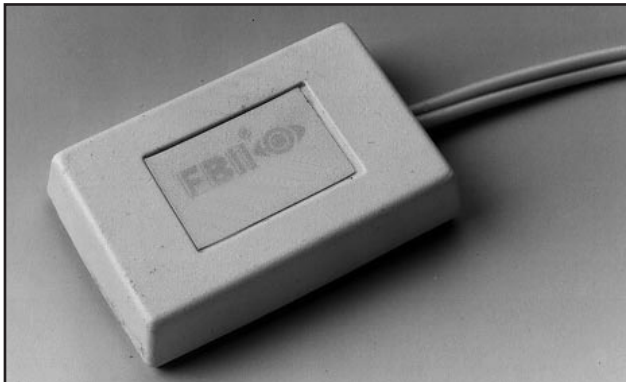

SPECIFICATIONS

Preferred mounting location:	1" (2.5cm) from corner of window
Range:	8' (1.8-2.4m)
Loop Voltage:	3VDC(min) to 20VDC maximum
Loop Current:	100mA maximum
Power Requirements:	Draws < 1mA
Transient Suppression:	600 watts for 1mS
Alarm Output Type:	N/C solid-state output, non-polarized
Alarm Output Resistance:	20 Ω maximum closed/non-alarm condition
Alarm Output Timing:	Open for 1 second minimum during an alarm condition

Operating Temperature: 0°F to 130°F (-18°C to +55°C)

Dimensions: 1.4"L x 0.95"W x 0.3"D
(35.6mm x 24.1mm x 7.6mm)

Wiring Leads: 22AWG, 2 conductor zip cord

HOW TO ORDER

SH15 Shock Sensor, 2 Wire, in white

SH15T Shock Sensor, 4 wire, for tampered loop, in white



FIRE BURGLARY INSTRUMENTS, INC.

165 Eileen Way, Syosset, NY 11791