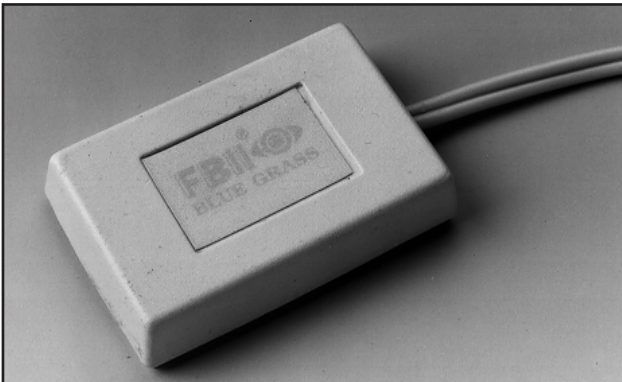


S P E C I F I C A T I O N S

SH-8**Shock Sensor****STANDARD FEATURES:**

- 6' to 8' radius (1.8m-2,4m)
- Protects all types of glass: plate, wired, tempered, laminated-radius listed is for 1/4" thick glass
- Self-powered piezo technology
- No processor required
- Mounts 1" (2.5cm) from corner
- Visible Detector deters potential intruders
- False Alarm Resistant
- Compatible with most wireless transmitters
- 5 Year warranty
- Sold in bags of 5

**SPECIFICATIONS**

Preferred mounting location:	1" (2.5cm) from corner of window
Range:	6'-8' (1.8-2.4m)
Loop Voltage:	20VDC maximum
Loop Current:	100mA maximum
Power Requirements:	Self Powered
Transient Suppression:	600 watts for 1mS
Alarm Output Type:	N/C solid-state output, non-polarized
Alarm Output Resistance:	20 Ω maximum closed/non-alarm condition
Alarm Output Timing:	Open for 1 second minimum during an alarm condition

Operating Temperature:	0°F to 130°F (-18°C to 55°C)
Dimensions:	1.4"L x 0.95"W x 0.3"D (35.6mm x 24.1mm x 7.6mm)
Wiring Leads:	24AWG, 2 conductor zip cord

SYSTEM COMPONENTS

SH-8	White
SH-8BR	Brown